

NOTES

1.Material & Finishing

Body: Stainless Steel TYPE 303 Passivate

Insulators: PTFE

Center Conductor : Beryllium Copper Gold Plating

2.Electrical Data:

Impedance: 50 Ohms

Frequency: DC~40GHz

VSWR 1.35Max.

Withstanding Voltage: 100 Vrms

Power Handing: 2 Watts Avg. @ 25°C



3.Mechanical Data

Durability: 500 Cycle Min.

4.Environment Data

Temperature Range: -40--+125 Deg.C

All materials are RoHS compliance

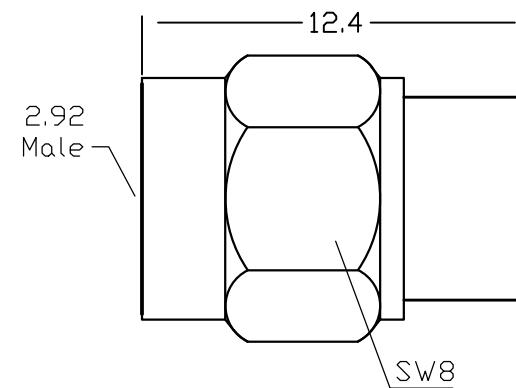

義政科技股份有限公司
E-INSTRUMENT TECH LTD.

客 戸		品 名	EL-50-2.92mm(P) LOAD
製 圖	許溶蒔	料 號	A0980
審 核	JACKY	日 期	2021/09/15
核 准		版 本	:A 單 位:mm