

## NOTES

### 1. Material & Finishing

Body: Stainless Steel TYPE 303 Passivate

Insulators: PEI

Center Conductor : Beryllium Copper Gold Plating

### 2. Electrical Data:

Impedance: 50 Ohms

Frequency: DC~40GHz

VSWR 1.15Max.




### 3. Mechanical Data

Durability: 500 Cycle Min.

### 4. Environment Data

Temperature Range: -40—+125 Deg.C

All materials are RoHS compliance

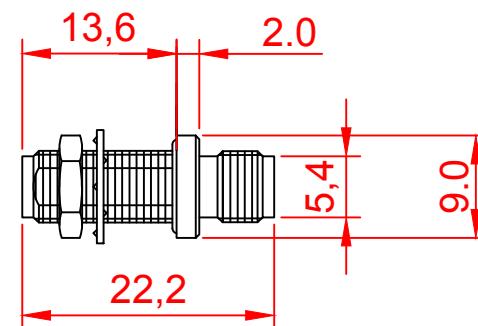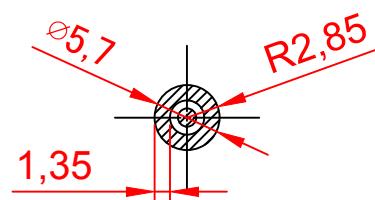

義政科技股份有限公司  
E-INSTRUMENT TECH LTD.

客戶		品名	2.92mm(J)-2.92mm(J) Bulkhead Adapter
製圖	Anita	料號	N0788
審核	Jacky	日期	2021/11/16
核准		版本:A	單位: mm