

Cavity Band rejection Filter

EBJ-1880-1930-001 帶阻濾波器



E-INSTRUMENT TECH LTD.



KEYFEATURES

- ▶ Frequency :1880-1930 MHz
- ▶ Connector :N Type
- ▶ Attenuation : $\geq 40\text{dB}$
- ▶ Impedance:50 Ω


E-INSTRUMENT TECH LTD.

TWOffice:+886.3.457.6809| CHINAOffice:+86.755.8299.6514 / +86.512.5792.3166

www.e-channel.com.tw

EBJ-1880-1930-001

Serial	Parameters	
1	Stop Band Frequency	1880~1930MHz
2	Stop Band Attenuation	≥40dB
3	Pass Band Frequency	DC~1830MHz & 1980~4600MHz
4	Pass Band Insertion Loss	≤1.5dB
5	Pass Band Return Loss	≥14dB
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤50W
9	Connectors	SMA-Female
10	Net Weight	0.245 KG
11	Configuration	As Below (Size Unit: mm)

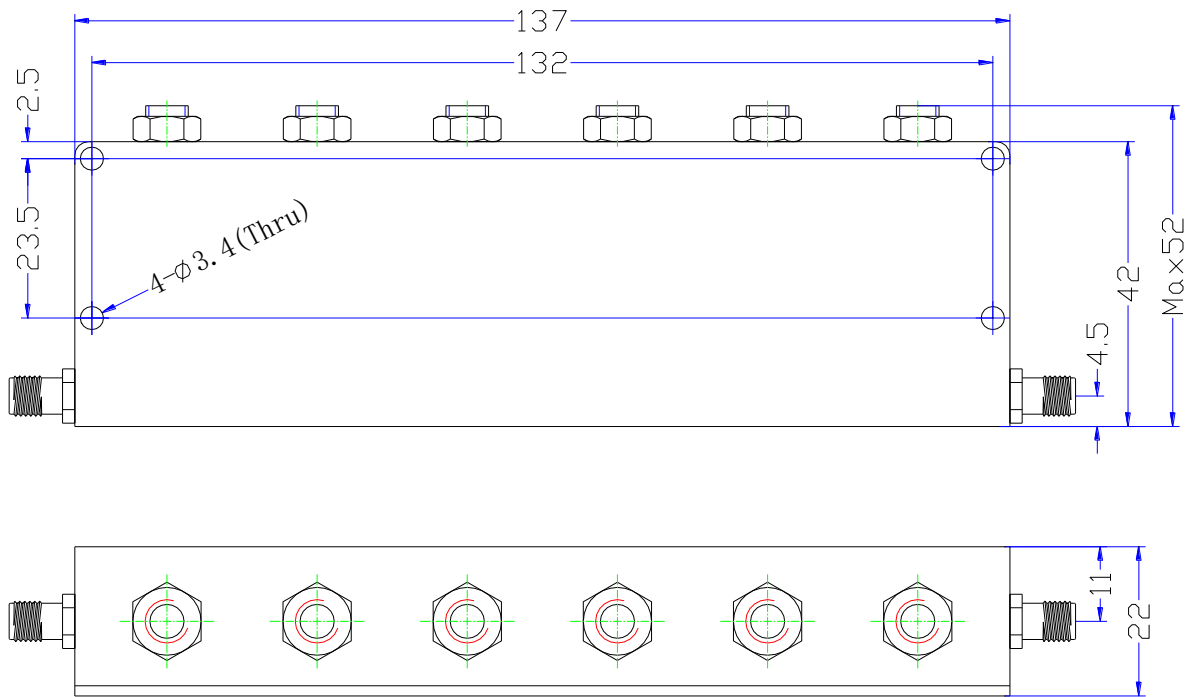

* Other product please see www.e-channel.com.tw