


NOTES

- 1.Material & Finishing
Body: Brass, Nickel Plating
Center Conductor : Beryllium-copper,Gold Plating
- 2.Electrical Data:
Impedance: 50 Ohms
Frequency: DC~18GHz
VSWR<1.25Max.
- 3.Mechanical Data
Durability: 500 Cycle Min.
- 4.Environment Data
Temperature Range: -40-+125 Deg.C
All materials are RoHS compliance

REVISIONS

LTR	DESCRIPTION	DATE	DCN NO.
A	RELEASE TO MFG.	6/23/20	200623006

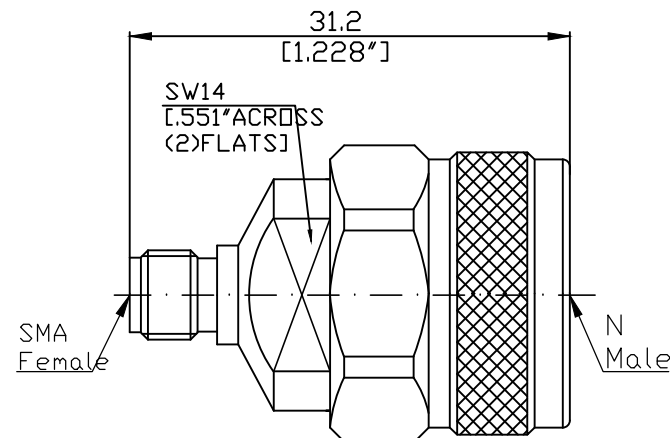

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

PROPRIETARY NOTICE THE INFORMATION CONTAINED IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN PERMISSION OF RFCONNECTOR.COM.CN	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES DECIMAL ANGULAR .X ± .1 ± .XX ± .05 DO NOT SCALE DRAWING	DRAWIN		TITLE: N Male to SMA Female 18GHz,Adapter		RFCONNECTOR WWW.RFCONECTOR.COM.CN 射频连接器
		CHECKED				
		ENGINEERING		DRAWING NO. ADASMANFM		REV. A01
		MANUFACTURING				
		QUALITY		SCALE: 4:1	WIGHT(gr):	SHEET OF